


GEAR PUMPS

DİŞLİ POMPALAR

POMPES A ENGRENAGES

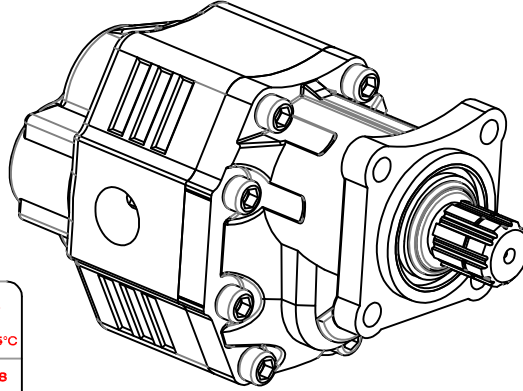

GEAR SERIES
DİŞLİ SERİSİ / SERIE D'ENGRENAGE

35'

CONNECTION TYPE
BAĞLANTI TİPİ / TYPE DE CONNEXION

ISO

DIRECTION OF ROTATION
DÖNÜŞ YÖNÜ / SENSE DE ROTATION
RIGHT OR LEFT
SAĞ VEYA SOL / DROITE OU GAUCHE


AVERAGE AMBIENT TEMPERATURE. ORTALAMA ORTAM SICAKLIĞI / Moyenne de Température Ambiente	<	-10°C	+10°C	>
	-10°C	+10°C	+35°C	+35°C
VG (cSt = mm ² /s)	22	32	46	68
WORKING TEMPERATURE ÇALIŞMA SICAKLIK ARALIĞI / Température d'Opération	-15°C / +100°C			

TECHNICAL DATAS

TEKNİK VERİLER - DONNES TECHNIQUE


TYPE CODE KOD	DISPLACEMENT DEPLASMAN Déplacement Cm ³ /rev.	CONTINUOUS OPERATING PRESSURE SÜREKLİ BASINÇ ARALIĞI / Pression de Travail en Continu	PEAK PRESSURE Test / PİK BASINCI / Pression de Test	MAX. CONTINUOUS SPEED MAKS. SÜREKLİ ÇALIŞMA HIZI / Vitesse de Travail Continue Max.	MIN. INTERMITTENT SPEED MIN. ÇALIŞMA HIZI / Vitesse de Travail intermittente Minimale	WEIGHT AĞIRLIK / Poids
Z-Q-6073-ISO	73	260 Bar (Max.)	275 Bar (Max.)	3000 Rpm. D./Dak.-Tr/Min	400 Rpm. D./Dak.-Tr/Min	18 kg.
Z-Q-6090-ISO	90	245 Bar (Max.)	260 Bar (Max.)	2500 Rpm. D./Dak.-Tr/Min	400 Rpm. D./Dak.-Tr/Min	19 kg.
Z-Q-6110-ISO	110	220 Bar (Max.)	245 Bar (Max.)	2500 Rpm. D./Dak.-Tr/Min	400 Rpm. D./Dak.-Tr/Min	20 kg.

TYPE CODE KOD	A (mm)	B (mm)	C1 IN Giriş /Aspir.	C2 OUT Çıkış /Sortie
Z-Q-6073-ISO	135	213	G 1-1/4	G 1
Z-Q-6090-ISO	142	220	G 1-1/4	G 1
Z-Q-6110-ISO	152	230	G 1-1/4	G 1

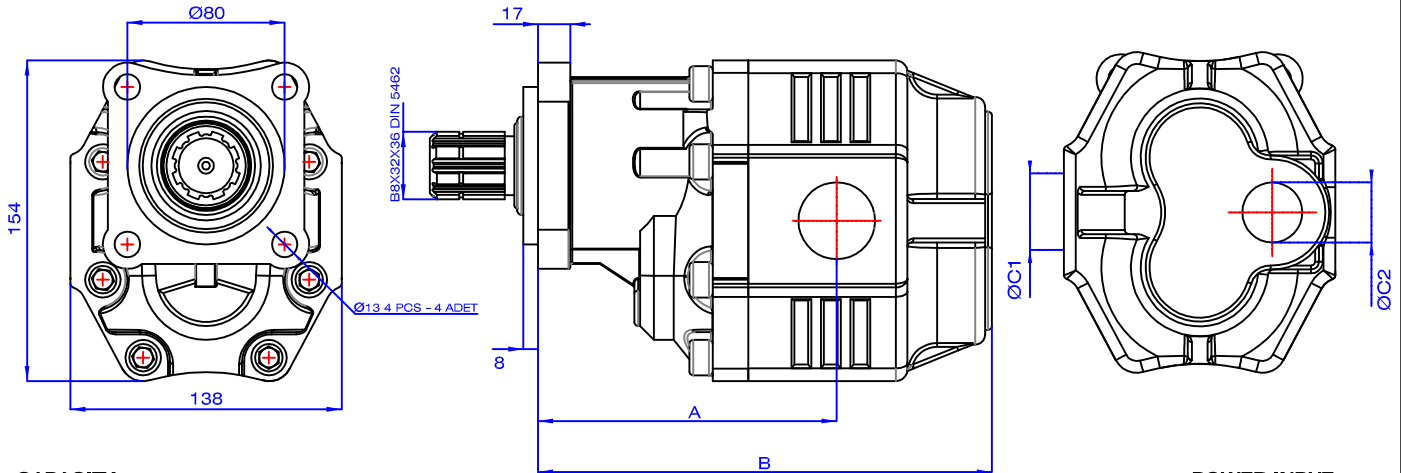

CAPACITY

KAPASİTE / CAPACITE

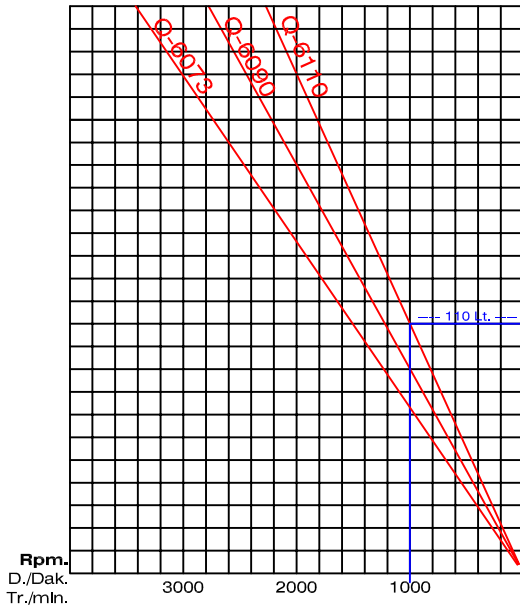

POWER INPUT

GÜÇ GİRİŞİ / ENTREE PUISSANCE

