


TANDEM GEAR PUMPS

TANDEM DİŞLİ POMPALAR

POMPES A ENGRENAGES TANDEM

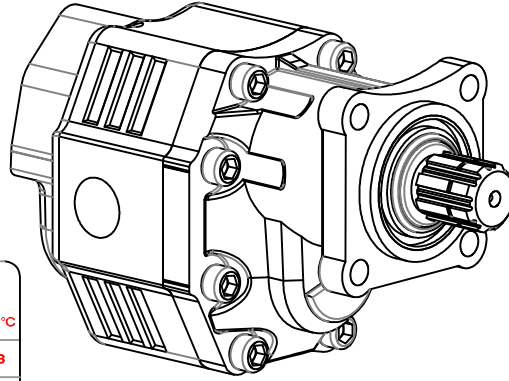

GEAR SERIES
DİŞLİ SERİSİ / SERIE D'ENGRENAGE

35'

CONNECTION TYPE
BAĞLANTI TİPİ / TYPE DE CONNEXION

ISO

DIRECTION OF ROTATION
DÖNÜŞ YÖNÜ / SENSE DE ROTATION
RIGHT OR LEFT
SAĞ VEYA SOL / DROITE OU GAUCHE


AVERAGE AMBIENT TEMPERATURE. ORTALAMA ORTAM SICAKLIĞI / Moyenne de Température Ambiante	< -10°C	-10°C	+10°C	> +35°C
VG (cSt = mm ² /s)	22	32	46	68
WORKING TEMPERATURE ÇALIŞMA SICAKLIK ARALIĞI / Température d'Opération	-15°C / +100°C			

TECHNICAL DATAS


TEKNİK VERİLER - DONNES TECHNIQUE

TYPE CODE KOD	DISPLACEMENT DEPLASMAN Déplacement Cm ³ / rev.	CONTINUOUS OPERATING PRESSURE SÜREKLİ BASINÇ ARALIĞI / Pression de Travail en Continue	PEAK PRESSURE Test / PİK BASINCI / Pression de Test	MAX. CONTINUOUS SPEED MAKS. SÜREKLİ ÇALIŞMA HIZI / Vitesse de Travail Continue Max.	MIN. INTERMITTENT SPEED MİN. ÇALIŞMA HIZI / Vitesse de Travail intermittente Minimale	WEIGHT AĞIRLIK / Poids
Z-QT-6073-ISO	73	260 Bar (Max.)	275 Bar (Max.)	3000 Rpm. D./Dak.-Tr/Min	400 Rpm. D./Dak.-Tr/Min	19 kg.
Z-QT-6090-ISO	90	245 Bar (Max.)	260 Bar (Max.)	2500 Rpm. D./Dak.-Tr/Min	400 Rpm. D./Dak.-Tr/Min	20 kg.
Z-QT-6110-ISO	110	220 Bar (Max.)	245 Bar (Max.)	2500 Rpm. D./Dak.-Tr/Min	400 Rpm. D./Dak.-Tr/Min	20,5 kg.

TYPE CODE KOD	A (mm)	B (mm)	C
Z-QT-6073-ISO	135	217	G 1
Z-QT-6090-ISO	142	224	G 1-1/4
Z-QT-6110-ISO	152	234	G 1-1/4

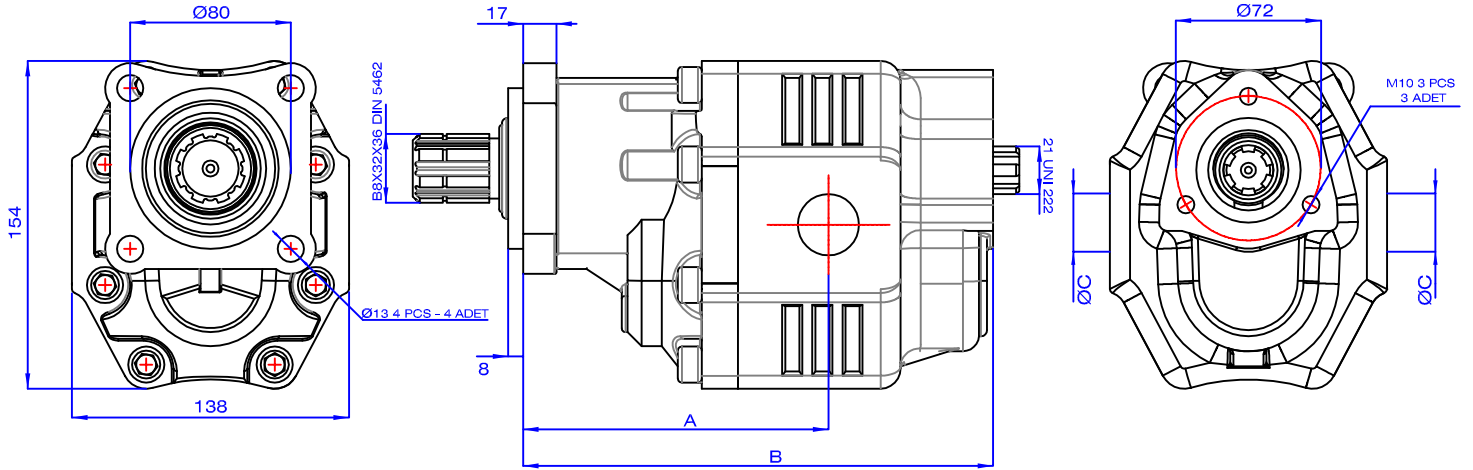

CAPACITY KAPASİTE / CAPACITE

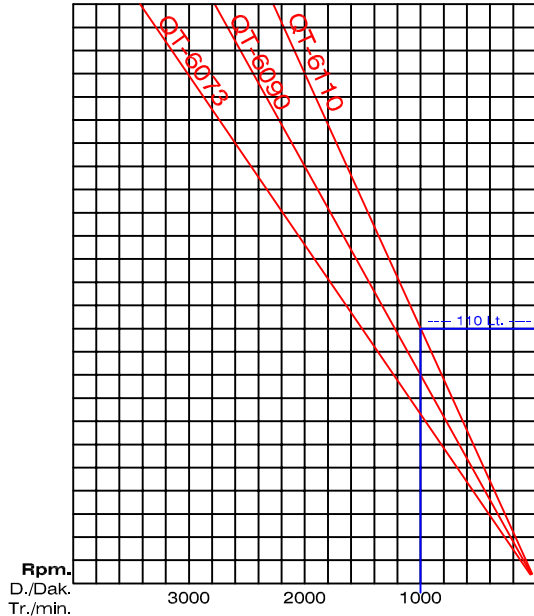

POWER INPUT GÜÇ GİRİŞİ / ENTREE PUISSANCE

