


TANDEM GEAR PUMPS

TANDEM DİŞLİ POMPALAR

POMPES A ENGRENAGES TANDEM

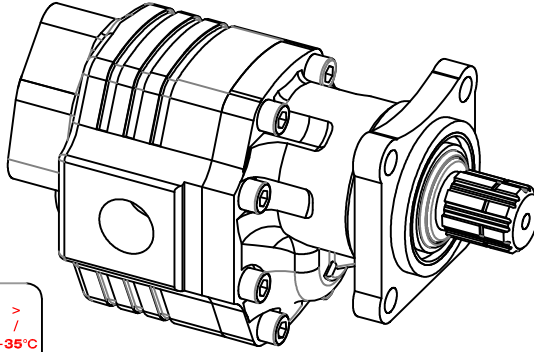

GEAR SERIES
DİŞLİ SERİSİ / SERIE D'ENGRENAGE

30'

CONNECTION TYPE
BAĞLANTI TİPİ / TYPE DE CONNEXION

ISO

DIRECTION OF ROTATION
DÖNÜŞ YÖNÜ / SENSE DE ROTATION
RIGHT OR LEFT
SAĞ VEYA SOL / DROITE OU GAUCHE


AVERAGE AMBIENT TEMPERATURE. ORTALAMA ORTAM SICAKLIĞI / Moyenne de Température Ambiante	< -10°C	-10°C	+10°C	> +35°C
VG (cSt = mm ² /s)	22	32	46	68
WORKING TEMPERATURE ÇALIŞMA SICAKLIK ARALIĞI / Température d'Opération	-15°C / +100°C			

TECHNICAL DATAS

TEKNİK VERİLER - DONNES TECHNIQUE


TYPE CODE KOD	DISPLACEMENT DEPLASMAN Déplacement Cm ³ /rev.	CONTINUOUS OPERATING PRESSURE SÜREKLİ BASINÇ ARALIĞI / Pression de Travail en Continue	PEAK PRESSURE Test / PİK BASINCI / Pression de Test	MAX. CONTINUOUS SPEED MAKS. SÜREKLİ ÇALIŞMA HIZI / Vitesse de Travail Continue Max.	MIN. INTERMITTENT SPEED MİN. ÇALIŞMA HIZI / Vitesse de Travail intermittente Minimale	WEIGHT AĞIRLIK / Poids
Z-QT-5034-ISO	34	290 Bar (Max.)	325 Bar (Max.)	2200 Rpm. D./Dak.-Tr/Min	350 Rpm. D./Dak.-Tr/Min	12,5 kg.
Z-QT-5043-ISO	43	270 Bar (Max.)	295 Bar (Max.)	2200 Rpm. D./Dak.-Tr/Min	350 Rpm. D./Dak.-Tr/Min	13,0 kg.
Z-QT-5051-ISO	51	230 Bar (Max.)	255 Bar (Max.)	2200 Rpm. D./Dak.-Tr/Min	300 Rpm. D./Dak.-Tr/Min	13,5 kg.
Z-QT-5061-ISO	61	210 Bar (Max.)	230 Bar (Max.)	1800 Rpm. D./Dak.-Tr/Min	300 Rpm. D./Dak.-Tr/Min	14,0 kg.
Z-QT-5082-ISO	82	200 Bar (Max.)	220 Bar (Max.)	1500 Rpm. D./Dak.-Tr/Min	300 Rpm. D./Dak.-Tr/Min	14,7 kg.

TYPE CODE KOD	A (mm)	B (mm)	C
Z-QT-5034-ISO	124	191	G 3/4
Z-QT-5043-ISO	127	197	G 3/4
Z-QT-5051-ISO	130,5	202	G 1
Z-QT-5061-ISO	136,5	208	G 1
Z-QT-5082-ISO	142,5	221	G 1-1/4

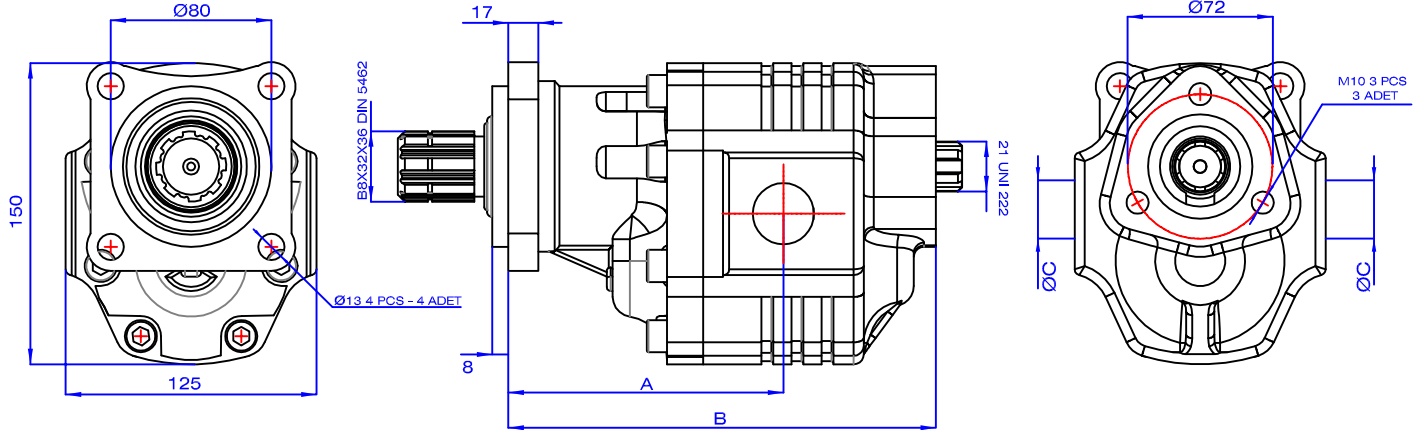

CAPACITY

KAPASİTE / CAPACITE

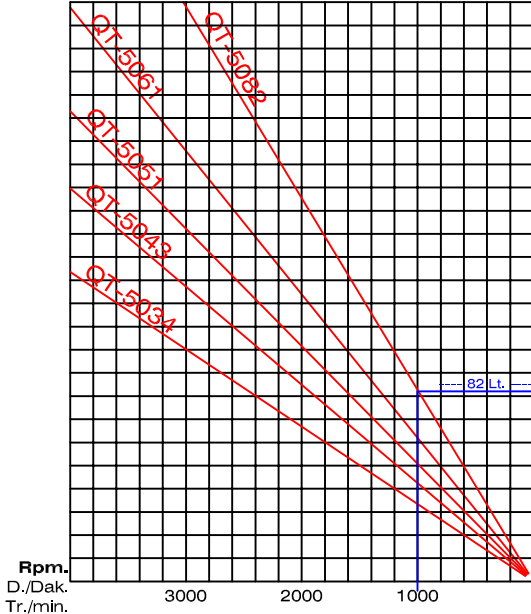

POWER INPUT

GÜÇ GİRİŞİ / ENTREE PUISSANCE

